

# SONGLE RELAY

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

RELAY ISO9002

SRD



## 1. MAIN FEATURES

- Switching capacity available by 10A in spite of small size design for highdensity P.C. board mounting technique.
- UL,CUL,TUV recognized.
- Selection of plastic material for high temperature and better chemical solution performance.
  - Sealed types available.
- Simple relay magnetic circuit to meet low cost of mass production.

## 2. APPLICATIONS

- Domestic appliance, office machine, audio, equipment, automobile, etc.  
 ( Remote control TV receiver, monitor display, audio equipment high rushing current use application.)

## 3. ORDERING INFORMATION

SRD	XX VDC	S	L	C
Model of relay	Nominal coil voltage	Structure	Coil	Contact form
SRD	03 05 06 09 12 24 48VDC	S:Sealed type F:Flux free type	L:0.36W D:0.45W	A:1 form A B:1 form B C:1 form C


## 4. RATING

CCC	FILE NUMBER:CQC03001003729	7A/240VDC
CCC	FILE NUMBER:CQC03001003731	10A/250VDC
UL/CUL	FILE NUMBER: E167996	10A/125VAC 28VDC
TUV	FILE NUMBER: R50056114	10A/250VAC 30VDC

## 5. DIMENSION(unit:mm)

## DRILLING(unit:mm)

## WIRING DIAGRAM

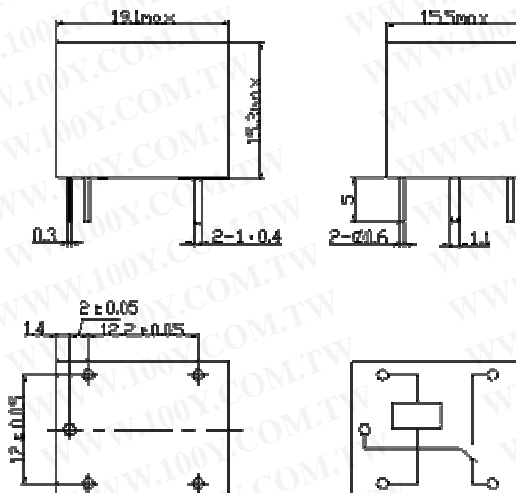

## 6. COIL DATA CHART (AT20 °C)

Coil Sensitivity	Coil Voltage Code	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance (Ω) □	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Max-Allowable Voltage (VDC)
SRD (High Sensitivity)	03	03	120	25	abt. 0.36W	75%Max.	10% Min.	120%
	05	05	71.4	70				
	06	06	60	100				
	09	09	40	225				
	12	12	30	400				
	24	24	15	1600				
SRD (Standard)	03	03	150	20	abt. 0.45W	75% Max.	10% Min.	110%
	05	05	89.3	55				
	06	06	75	80				
	09	09	50	180				
	12	12	37.5	320				
	24	24	18.7	1280				
	48	48	10	4500	abt. 0.51W			

## 7. CONTACT RATING


Item	Type	
	FORM C	SRD FORM A
Contact Capacity	7A	10A 30VDC
Resistive Load (cosΦ=1)	30VDC	10A 240VAC
Inductive Load (cosΦ=0.4 L/R=7msec)	10A 125VAC	5A 120VAC
	10A 250VAC	5A 28VDC
Max. Allowable Voltage	3A 120VAC	3A 28VDC
	3A 28VDC	
Max. Allowable Power Force	250VAC/110VDC	250VAC/110VDC
	800VAC/240W	1200VA/300W
Contact Material	AgCdO	AgCdO

## 8. PERFORMANCE (at initial value)


Item	Type
Contact Resistance	SRD
Operation Time	100mΩ Max.
Release Time	10msec Max.
Dielectric Strength	5msec Max.
	Between coil & contact
Between contacts	1000VAC 50/60HZ (1 minute)
Insulation Resistance	100 MΩ Min. (500VDC)
Max. ON/OFF Switching	
Mechanically	300 operation/min
Electrically	30 operation/min
Ambient Temperature	-25°C to +70 C
Operating Humidity	45 to 85% RH
Vibration	
Endurance	10 to 55Hz Double Amplitude 1.5mm
Error Operation	10 to 55Hz Double Amplitude 1.5mm
Shock	
Endurance	100G Min.
Error Operation	10G Min.
Life Expectancy	
Mechanically	10 <sup>7</sup> operations. Min. (no load)
Electrically	10 <sup>5</sup> operations. Min. (at rated coil voltage)
Weight	abt. 10grs.

## 9. REFERENCE DATA


### Coil Temperature Rise




### Operation Time

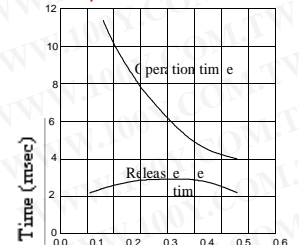

### Life Expectancy



### Life Expectancy



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)